

Laredo SERIES

Model L25LP
L25SP/L25FL



L25SP: Shown with optional short panel Cathedral lites.



L25LP: 25 gauge door, 43"x14" Ultra high definition long panel (LP),
Shown with optional Diamond lites.

L25FL: 25 gauge door,
flush panel (LP)

L25SP: 25 gauge door,
20"x14" Ultra high definition
short panel (SP)

The Laredo Series offers the highest level of strength, durability and insulation in a garage door by laminating a CFC-free polystyrene core of insulation between two sheets of steel. At a thermally efficient R-factor of 9.0, the Laredo provides the best protection from the weather as well. 1ST UDT's Ultra High Definition™ raised panel sets the door apart from all others. The flat portion of the raised panel is shorter in height, and with the exclusive depth of the frames a smartly styled appearance is created. With over ten optional window configurations, the Laredo can be uniquely matched to enhance the appearance of any home well beyond the end of the driveway!



Maximum insulation and strength with woodgrain embossed 25 gauge steel front skin, 2" CFC-free insulation and 26 gauge steel back skin.

1ST United Door Technologies

7255 S. Kyrene, Suite #104
Tempe, Arizona 85283
Phone: 480-705-6632
Fax: 480-705-8497
sales@firstudt.com

Riverside California Distribution Center

1885 Iowa Avenue
Riverside, CA 92507
Phone: 951-787-8956
Fax: 951-905-5211
calsales@firstudt.com


Laredo series Model L25SP, L25LP & L25FL

• Premium Materials • Superior Insulation

The Laredo Series is unmatched in quality construction and materials. A full 2" thick with ultra high definition raised panels manufactured from 25 gauge steel on the face and 26 gauge steel on the backskin. With a thermally efficient R-factor of 9.0, the Laredo Series provides great strength and maximum protection from the elements along with the most distinctive raised panels found in the industry.


Specifications: Steel sections are a full 2" thick and are manufactured from 25 gauge hot-dipped galvanized steel on the face skin and 26 gauge steel on the backskin in 21- and 18-inch heights. Both of the steel skins are pre-painted white or almond with a ten coat rust protection system and rotary embossed with a woodgrain texture. Ultra high definition raised panels are pressed into the steel face skin in .125 increments and obtain a depth of .375" which is exclusive among garage doors. The steel skins are laminated to a CFC-free polystyrene core delivering an R-value up to 9.0. Tongue and groove meeting rails ensure a weathertight fit at the section joints. Bottom sections are fitted with a full-length reinforced aluminum bottom retainer that is mechanically fastened and bonded to the section with structural adhesive for added strength, and it supports a replaceable UV protected grooved weather seal for further weather protection.

H-2 Hardware and Track: Hinges are the commercial wide body design in 14 and 16 gauge galvanized steel. Rollers are black pre-lubricated nylon, torsion springs are pre-coated with corrosion-resistant coating, fasteners are self-locking, and the torsion tubes are galvanized. Inside lock is provided with red operational safety handles and blue 7/16" diameter pull rope.

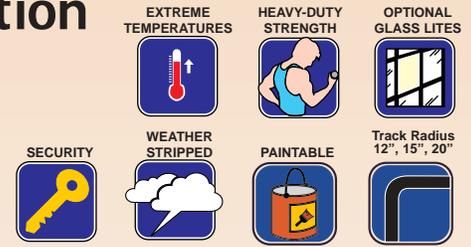

Upgrade Options:

Glass Designs: 2 panel, 3 panel, 4 panel & 8 panel designs

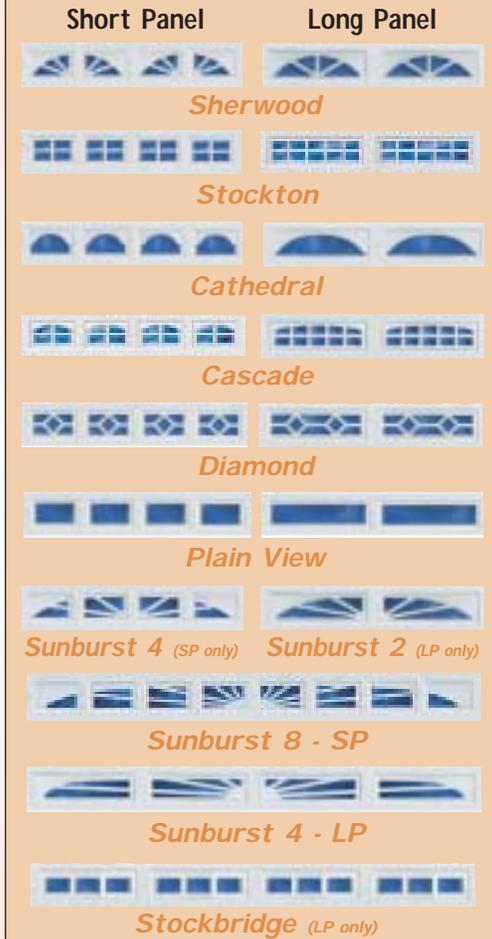

Hardware:

H-3 Optional hardware includes 14 gauge commercial hinges throughout. Commercial top fixtures and heavy-duty bottom fixtures, 10 ball white nylon rollers, double lift handles, inside slide lock, back-hang fasteners, pre-painted springs, galvanized torsion tube, .051 gauge Vertical track and .060 gauge Horizontal track.

Widths & Heights:

Widths: 8', 9', 10', 16', 18'

Heights: 6', 6'-3", 6'-6", 6'-9", 7', 7'-6", 7'-9", 8'



Energy Efficient Insulation


Face skin is 25 gauge steel, the backskin is 26 gauge steel, and sandwiched between the two sheets of steel is a CFC-free polystyrene core of insulation creating an R-factor of 9.0. 20 gauge steel end stiles encapsulate each end of the section. Interior hinge straps run the full height of the section.



Reinforced Aluminum Bottom Extrusion

Heavy duty grooved "U" type weather seal is set into an aluminum reinforced "L" angle, is mechanically fastened and bonded to the section with structural adhesive.

Ten Coat Rust Protection

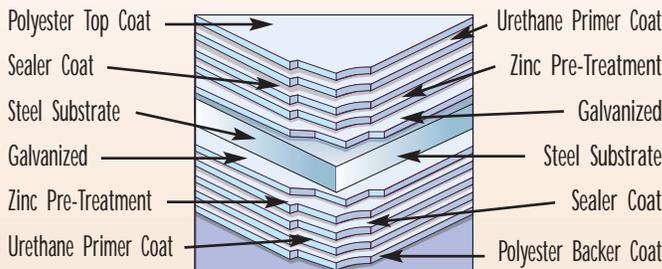

Available in: White Almond

Distributed By:

www.firstudt.com

WARRANTY

First United Door Technologies warrants each garage door and component parts to be free from defects in material and workmanship to the original purchaser.

A copy of this warranty is available upon request.

sales@firstudt.com



08 36 13/FIR
BuyLine 4566

McGraw Hill CONSTRUCTION Sweets

Grande Series 0206